
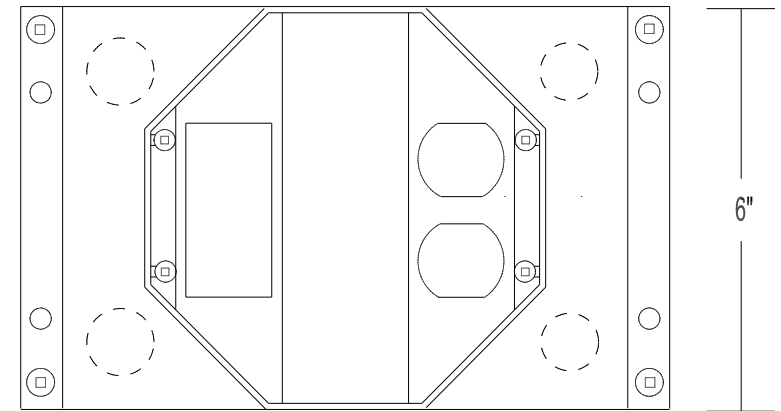


OPENING IN LID
ALLOWS CABLES TO
EXIT BOX WHEN
LID IS CLOSED



STAINLESS STEEL
GASKETED LID
& TRAP DOOR

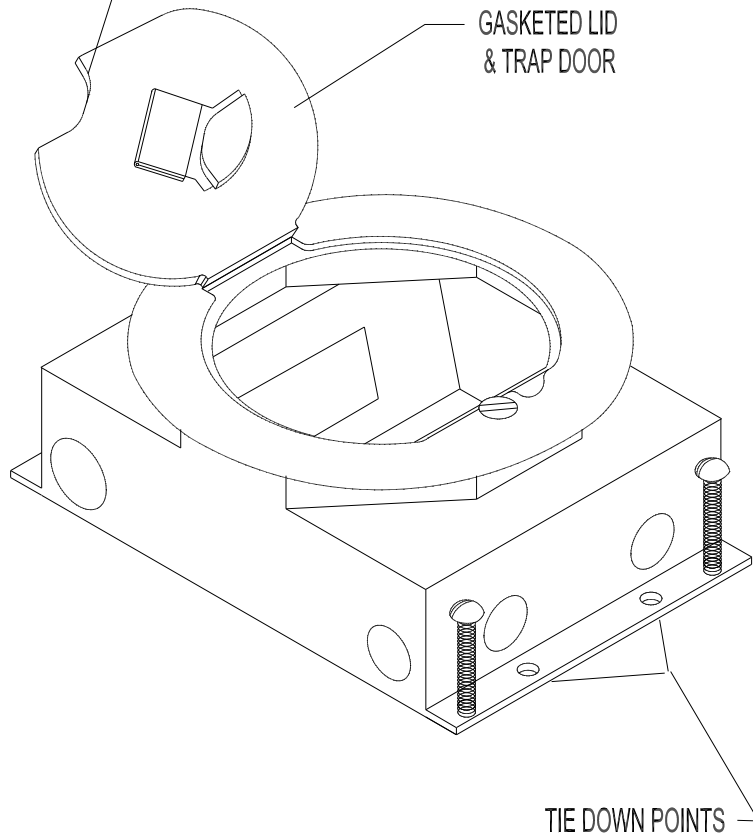

(1) DECORATOR OPENING
COMMUNICATION

(1) DUPLEX OPENING
POWER

TOP VIEW INSIDE BOX

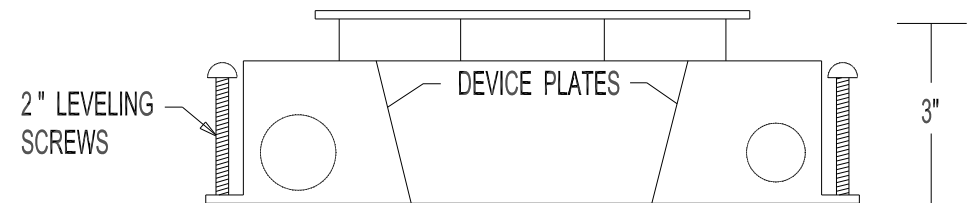

SIDE VIEW



WELLMARK ELECTRIC
PH: 519-650-4495
wellmarkelectric.com

MATERIALS: BOX- 16 GA. GALV. STEEL LID & SURROUND- 1/8" STAINLESS STEEL

NOTES: STANDARD KNOCKOUTS - 3/4" POWER 1" COMMUNICATION



TITLE

410RL SERIES CONCRETE FLOOR BOX

DIMENSIONS IN INCHES
UNLESS OTHERWISE SPECIFIED

SCALE NTS

REFERENCE

DR. BY MP

DATE 01 / 17

PART NO.


APP. BY

DATE

410RL-1YX-SS


OPENING IN LID
ALLOWS CABLES TO
EXIT BOX WHEN
LID IS CLOSED

STAINLESS STEEL
GASKETED LID
& TRAP DOOR

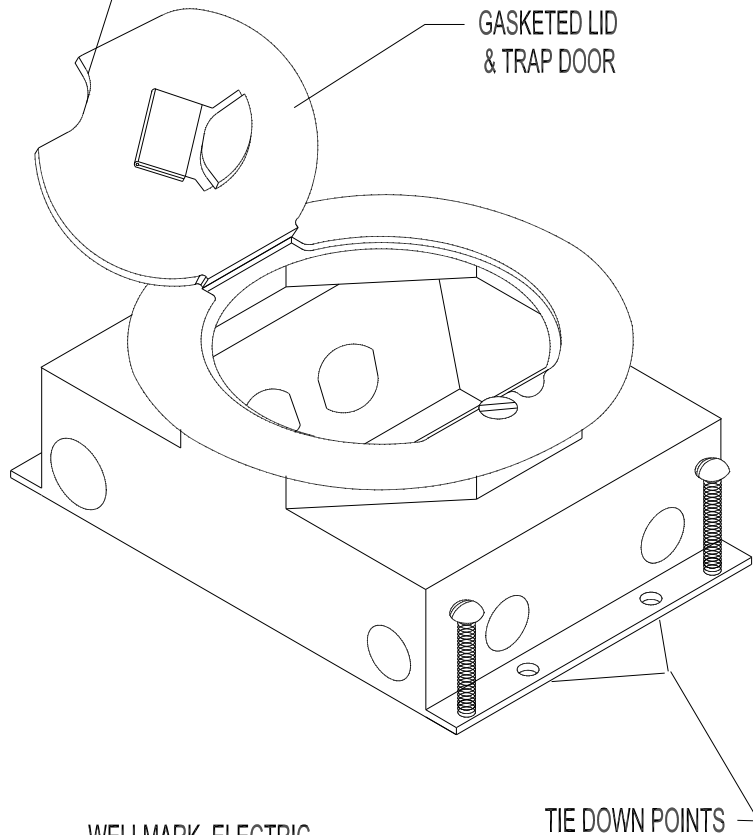

WELLMARK ELECTRIC
PH: 519-650-4495
wellmarkelectric.com


REMOVEABLE TUNNEL 3/8" X 3/4"
CROSS SECTIONAL SIZE

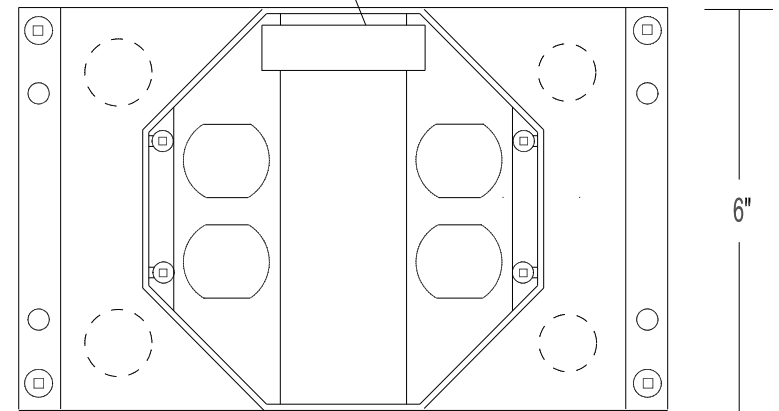

(1) DUPLEX OPENING
POWER

(1) DUPLEX OPENING
POWER

TOP VIEW INSIDE BOX

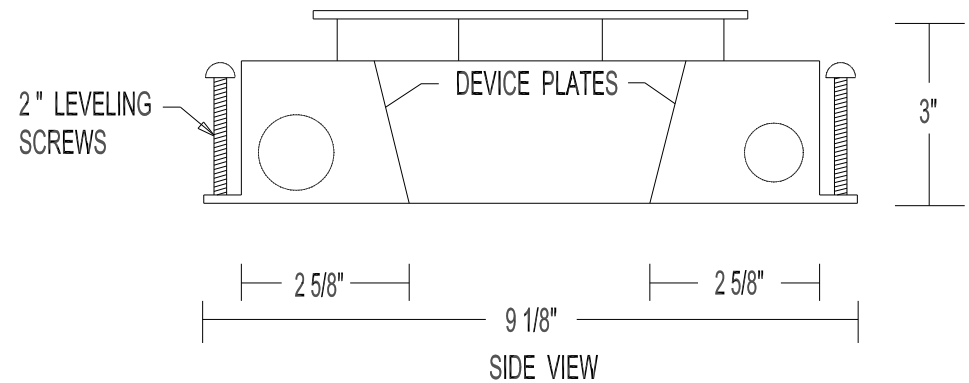

2" LEVELING
SCREWS

DEVICE PLATES

2 5/8" 9 1/8" 2 5/8"

SIDE VIEW

MATERIALS: BOX- 16 GA. GALV. STEEL LID & SURROUND- 1/8" STAINLESS STEEL

NOTES: STANDARD KNOCKOUTS - 3/4" & 1" POWER



TITLE

410RL SERIES CONCRETE FLOOR BOX

DIMENSIONS IN INCHES
UNLESS OTHERWISE SPECIFIED

SCALE NTS

REFERENCE

DR. BY MP

DATE 1/17

PART NO.

APP. BY

DATE

410RL-1YY-SS-TUNNEL